

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Краснодар (861)203-40-90	Санкт-Петербург (812)309-46-40
Астана (7172)727-132	Красноярск (391)204-63-61	Саратов (845)249-38-78
Астрахань (8512)99-46-04	Курск (4712)77-13-04	Севастополь (8692)22-31-93
Барнаул (3852)73-04-60	Липецк (4742)52-20-81	Симферополь (3652)67-13-56
Белгород (4722)40-23-64	Магнитогорск (3519)55-03-13	Смоленск (4812)29-41-54
Брянск (4832)59-03-52	Москва (495)268-04-70	Сочи (862)225-72-31
Владивосток (423)249-28-31	Мурманск (8152)59-64-93	Ставрополь (8652)20-65-13
Волгоград (844)278-03-48	Набережные Челны (8552)20-53-41	Сургут (3462)77-98-35
Вологда (8172)26-41-59	Нижний Новгород (831)429-08-12	Тверь (4822)63-31-35
Воронеж (473)204-51-73	Новокузнецк (3843)20-46-81	Томск (3822)98-41-53
Екатеринбург (343)384-55-89	Новосибирск (383)227-86-73	Тула (4872)74-02-29
Иваново (4932)77-34-06	Омск (3812)21-46-40	Тюмень (3452)66-21-18
Ижевск (3412)26-03-58	Орел (4862)44-53-42	Ульяновск (8422)24-23-59
Казань (843)206-01-48	Оренбург (3532)37-68-04	Уфа (347)229-48-12
Калининград (4012)72-03-81	Пенза (8412)22-31-16	Хабаровск (4212)92-98-04
Калуга (4842)92-23-67	Пермь (342)205-81-47	Челябинск (351)202-03-61
Кемерово (3842)65-04-62	Ростов-на-Дону (863)308-18-15	Череповец (8202)49-02-64
Киров (8332)68-02-04	Рязань (4912)46-61-64	Ярославль (4852)69-52-93
	Самара (846)206-03-16	

Единый адрес: rno@nt-rt.ru **Веб-сайт:** www.redlion.nt-rt.ru

РоЕ коммутаторы 1000-РОЕ4 RED LION. Техническое описание

1000-POE4+ Gigabit Midspan Injector

N-Tron Networking Series



▶▶▶ Industrial Unmanaged Gigabit PoE+

Red Lion's N-Tron® series 1000-POE4+ Gigabit PoE+ midspan injector simplifies network deployments by providing a robust solution for transmitting power and data to industrial network assets.

With 4 10/100/1000BaseT(X) RJ45 ports (data in) and 4 10/100/1000BaseT(X) RJ45 PoE+ ports (data and power out) that support 30 watts per port, the 1000-POE4+ Gigabit PoE+ injector combines Gigabit data communications and power over a single Ethernet network cable. Ideal for deployment in security and surveillance, oil and gas, transportation, utilities and factory automation applications, the 1000-POE4+ injector provides auto-sensing plug-and-play performance for four PoE+ devices such as video cameras, IP phones and wireless access points.



APPLICATIONS

- > Security & Surveillance
- > Oil & Gas
- > Transportation
- > Utilities
- > Alternative Energy
- > Factory Automation

PRODUCT HIGHLIGHTS

- > Plug-and-Play Operation
- > IEEE 802.3af/at PoE+
- > Compact Size with Hardened Metal Enclosure
- > Wide -40° to 85°C Operating Temperature
- > Redundant 22 to 49 VDC Power Inputs

FEATURES & BENEFITS

- > 4 Gigabit PoE+ Ports
 - 10/100/1000Base-T(X) PoE+ copper ports
 - Provides Gigabit connectivity and 30 watts of power
- > Redundant 22 to 49 VDC Power Inputs
 - Keeps network running in the event of a power supply failure
 - Boosts power to meet PoE+ output requirements
- > Robust Industrial Design
 - Wide -40° to 85°C operating temperature range
 - UL/cUL: Class I, Division 2 Groups A, B, C, D, T4
- > Unmanaged Switch Operation
 - American Bureau of Shipping (ABS) type approval
 - IEEE 1613 for electric utility substations
 - Ultra-reliable > 2 million hours MTBF
 - Plug-and-play operation
 - Jumbo frame support
 - Full IEEE 802.3af/at compliance
 - Up to 8 Gb/s maximum throughput
 - Full wire speed communications

industrial
networking



▶▶▶ 1000-POE4+ Gigabit POE+ Midspan Injector Specifications

SWITCH PROPERTIES

Operation: Unmanaged
IEEE Compliance: 802.3af/at
LED Status Indicators
Maximum Throughput: Up to 8 Gb/s
Communications: Full Wire Speed
MTBF: >2 million hours

POWER INPUT

Input Voltage Range: Dual 22-49 VDC power inputs
Steady Input Current (Full Load): 5.25 A @ 24 VDC
Steady Input Current (No Load): 280mA @ 24 VDC
Inrush: 59.9 A / 60us @ 24 VDC
BTU/HR: 50

POWER OVER ETHERNET

PoE Standard: IEEE 802.3af/at Gigabit mid-span PSE
PoE Output Power: 57 VDC / 30 W (25.5 W at PD) per port
Power Pin Assignment: Pins 1/2 (+), Pins 3/6 (-)
PSE Type: Type 2

CONNECTORS

10/100/1000Base-T: Eight (8) RJ-45 ports
Data In: Four (4) 10/100/1000Base-T ports
Data/PoE Out: Four (4) 10/100/1000Base-T ports

NETWORK MEDIA

10BaseT: ≥ Cat3 cable
100BaseTX: ≥ Cat5 cable
1000Base-T: ≥ Cat5e cable
802.3af (802.3at Type 1) PoE: ≥ Cat3 cable
802.3at Type 2 PoE+: ≥ Cat5 cable

RECOMMENDED WIRING CLEARANCE

Front: 2" (5.08 cm)
Top: 1" (2.54 cm)

ENVIRONMENTAL

Operating Temperature: -40°C to 85°C
Storage Temperature: -40°C to 85°C
Operating Humidity: 10% to 95% (non condensing)
Operating Altitude: 0 to 10,000 ft.
Shock: 200 g @ 10 ms (bulkhead mounted)
Vibration/Seismic: 50 g, 5-200 Hz, triaxial (bulkhead mounted)

CERTIFICATION & COMPLIANCE

Product Safety: ANSI/ISA 12.12.01-2015 Class I and II, Div. 2 and Class III, Div. 1 and 2, Groups A, B, C and D Hazardous Locations, T4 UL508 Industrial Control Equipment
CAN/CSA-C22.2 No. 213-15, Hazardous Locations
CAN/CSA-C22.2 No. 14-13, Industrial Control Equipment
Emissions: FCC Title 47, Part 15, Radio Frequency Devices, Subpart B, ANSI C63.4-2009; Industry Canada ICES-003, EN 55032, EN 61000-3-2, EN61000-3-3
Immunity: EN 55024, EN 61000-6-2, EN 61000-4-2 (ESD); EN 61000-4-3 (RFAM); EN 61000-4-4 (EFT); EN 61000-4-5 (SURGE); EN 61000-4-6 (RFEM); EN 61000-4-8 (PFMF); EN 61000-4-11 (VDI)
Rail: EN 50155, EN 50121 and EN 61373
Designed to Comply with: IEEE 1613 (Electric Utility Substations), NEMA TS1/TS2 (Traffic Control)
Other: ABS Type Approval for Shipboard Applications; EMC Directive 2014/30/EU; LV Directive 2014/35/EU GOST-R, RoHS Compliant

MECHANICAL

Case Dimensions:
Height: 5.9" (15 cm)
Width: 2.0" (5.1 cm)
Depth: 5.9" (15 cm)
Weight: 1.45 lbs (0.66 kg)
Ingress Protection: IP20
Mount: DIN rail (35 mm)

WARRANTY

3 Years on Design and Manufacturing Defects


ORDERING GUIDE

MODEL NUMBER	DESCRIPTION
1000-POE4+	4-Port Industrial Gigabit PoE+ Mid-Span Injector (4 10/100/1000Base-T Ports Data In, 4 10/100/1000Base-T Data/PoE+ Out)
NTPS-24-10	DIN-Rail Power Supply 10 Amp @ 24 VDC
1K26-PMK	Panel Mount Kit, 1000 Series

Specifications are subject to change.

▶▶▶ 1000-POE4+ Gigabit POE+ Midspan Injector Specifications

DIMENSIONS

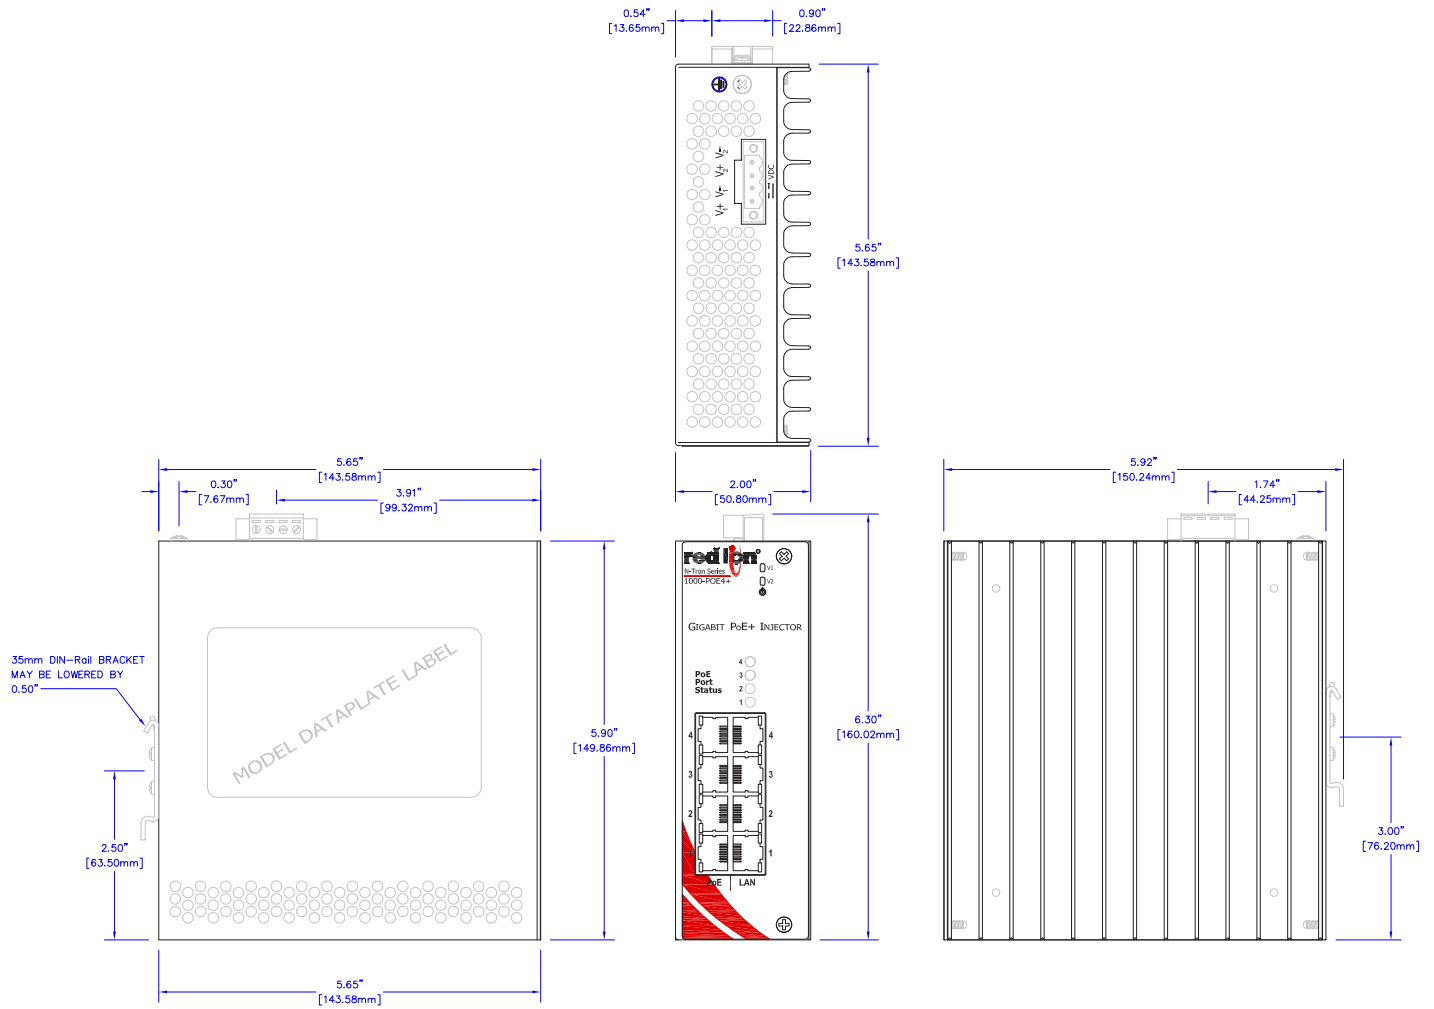

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Краснодар (861)203-40-90	Санкт-Петербург (812)309-46-40
Астана (7172)727-132	Красноярск (391)204-63-61	Саратов (845)249-38-78
Астрахань (8512)99-46-04	Курск (4712)77-13-04	Севастополь (8692)22-31-93
Барнаул (3852)73-04-60	Липецк (4742)52-20-81	Симферополь (3652)67-13-56
Белгород (4722)40-23-64	Магнитогорск (3519)55-03-13	Смоленск (4812)29-41-54
Брянск (4832)59-03-52	Москва (495)268-04-70	Сочи (862)225-72-31
Владивосток (423)249-28-31	Мурманск (8152)59-64-93	Ставрополь (8652)20-65-13
Волгоград (844)278-03-48	Набережные Челны (8552)20-53-41	Сургут (3462)77-98-35
Вологда (8172)26-41-59	Нижний Новгород (831)429-08-12	Тверь (4822)63-31-35
Воронеж (473)204-51-73	Новокузнецк (3843)20-46-81	Томск (3822)98-41-53
Екатеринбург (343)384-55-89	Новосибирск (383)227-86-73	Тула (4872)74-02-29
Иваново (4932)77-34-06	Омск (3812)21-46-40	Тюмень (3452)66-21-18
Ижевск (3412)26-03-58	Орел (4862)44-53-42	Ульяновск (8422)24-23-59
Казань (843)206-01-48	Оренбург (3532)37-68-04	Уфа (347)229-48-12
Калининград (4012)72-03-81	Пенза (8412)22-31-16	Хабаровск (4212)92-98-04
Калуга (4842)92-23-67	Пермь (342)205-81-47	Челябинск (351)202-03-61
Кемерово (3842)65-04-62	Ростов-на-Дону (863)308-18-15	Череповец (8202)49-02-64
Киров (8332)68-02-04	Рязань (4912)46-61-64	Ярославль (4852)69-52-93
	Самара (846)206-03-16	

Единый адрес: rno@nt-rt.ru **Веб-сайт:** www.redlion.nt-rt.ru