

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Краснодар (861)203-40-90	Санкт-Петербург (812)309-46-40
Астана (7172)727-132	Красноярск (391)204-63-61	Саратов (845)249-38-78
Астрахань (8512)99-46-04	Курск (4712)77-13-04	Севастополь (8692)22-31-93
Барнаул (3852)73-04-60	Липецк (4742)52-20-81	Симферополь (3652)67-13-56
Белгород (4722)40-23-64	Магнитогорск (3519)55-03-13	Смоленск (4812)29-41-54
Брянск (4832)59-03-52	Москва (495)268-04-70	Сочи (862)225-72-31
Владивосток (423)249-28-31	Мурманск (8152)59-64-93	Ставрополь (8652)20-65-13
Волгоград (844)278-03-48	Набережные Челны (8552)20-53-41	Сургут (3462)77-98-35
Вологда (8172)26-41-59	Нижний Новгород (831)429-08-12	Тверь (4822)63-31-35
Воронеж (473)204-51-73	Новокузнецк (3843)20-46-81	Томск (3822)98-41-53
Екатеринбург (343)384-55-89	Новосибирск (383)227-86-73	Тула (4872)74-02-29
Иваново (4932)77-34-06	Омск (3812)21-46-40	Тюмень (3452)66-21-18
Ижевск (3412)26-03-58	Орел (4862)44-53-42	Ульяновск (8422)24-23-59
Казань (843)206-01-48	Оренбург (3532)37-68-04	Уфа (347)229-48-12
Калининград (4012)72-03-81	Пенза (8412)22-31-16	Хабаровск (4212)92-98-04
Калуга (4842)92-23-67	Пермь (342)205-81-47	Челябинск (351)202-03-61
Кемерово (3842)65-04-62	Ростов-на-Дону (863)308-18-15	Череповец (8202)49-02-64
Киров (8332)68-02-04	Рязань (4912)46-61-64	Ярославль (4852)69-52-93
	Самара (846)206-03-16	

Единый адрес: rno@nt-rt.ru **Веб-сайт:** www.redlion.nt-rt.ru

РоЕ коммутатор EB-PSE RED LION. Техническое описание

EB-PSE Industrial PoE Injectors

Sixnet Networking Series



▶▶▶ Industrial Power over Ethernet Injectors

Pass Power & Data to your Ethernet Field Devices over the same Cable.

The EB-PSE-24V-1 or EB-PSE-48V-2 industrial PoE power injectors add 48 VDC power into 1 or 2 Ethernet ports so that you can pass power and data over the same wire to your Ethernet devices in the field. The 24V-1 model steps up your 24 VDC for sourcing 1 PoE port so no separate DC/DC converter is required. The 48V-2 model is two injectors in one to save space and money. Both are ultra-reliable, reliable and easy to use.



APPLICATIONS

- > Video and security
- > Industrial automation and control
- > Fully IEEE 802.3af compliant PSE (Power Sourcing Equipment) operation



PRODUCT HIGHLIGHTS

- > Process machine and motion control
- > Model 1 directly runs off of your existing 24 VDC and powers 1 PoE (48 VDC) port
- > Model 2 saves you space and money by powering 2 PoE (48 VDC) ports
- > Industrial rated for -40 to 75°C operation

FEATURES & BENEFITS

- > IEEE 802.3af compliant PoE ports
 - Power Sourcing Equipment (PSE) operation
 - Auto-detection of PD (powered devices)
 - Supplies up to 15.4 watts per channel
 - Over-temperature and over-current detection
 - Over and under-voltage protection

- > True plug and play simplicity
 - No user settings
 - Ready to use right out of the box
- > Trouble free operation
 - Ultra-reliable 1,000,000+ hours MTBF
 - Slim package for DIN rail or panel mounting

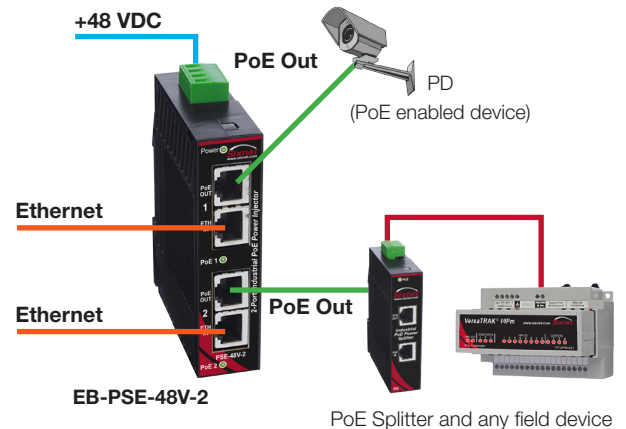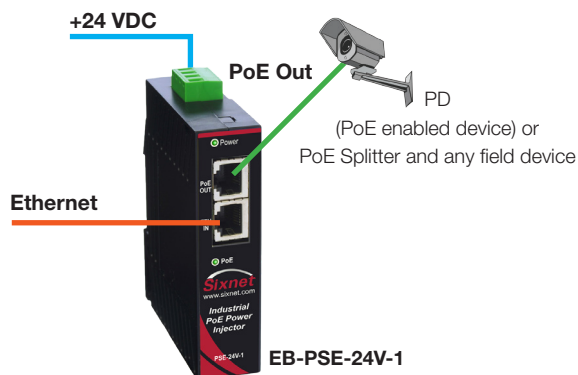

industrial
networking



Industrial Power over Ethernet Injectors Specifications

SWITCH PROPERTIES

Ethernet protocols supported: All IEEE 802.3
 Ethernet connectors per channel: 2 (1 for Ethernet in, 1 for PoE out)
 Ethernet port standards: 10/100BaseTX IEEE 802.3 / 802.3u

POE OUTPUT

IEEE 802.3af PoE operation: Power Sourcing Equipment (PSE)
 PoE power output
 48 VDC @ 15.4 Watts per channel
 24V model: Derate 1W per 2°C over 60°C
 RJ45 PoE pin assignments
 A=unused pair: TX(3,6); RX(1,2); V-(7,8); V+(4,5)
 B=signal pair: TX/V- (3, 6); RX/V+ (1, 2)
 PoE operation: Auto-detection & power management
 PoE disconnect mode: AC for 24V-1 and DC for 48V-2
 PoE protection: Over-temp, over-current,
 over/under-voltage & transient

OPTIONS

Power input for 48V-2 models: 45-56 VDC @ 31 Watts max.
 Power input for 24V-1 models: 18-30 VDC @ 20 Watts max.
 Transient protection 15,000 watts peak
 Spike protection 5,000 watts (10 times for 10 uS)

SUBMITTED FOR TESTING

Electrical safety: UL508/CSA C22.2/14; EN61010-1, CE
 EMI emissions: FCC part 15, ICES-003; EN61000-6-4, CE
 EMC immunity: IEC61000-6-2, CE
 Hazardous locations: UL1604, CSA C22.2/213 (Class I, Div. 2);
 EN60079-15 (Zone 2; Category 3), CE (ATEX)


ENVIRONMENTAL

Operating temperature range: -40 to +75°C
 (cold startup @ -40°C)
 24V model: Derate 1W per 2°C over 60°C
 Storage temperature range: -40 to +85 °C
 Humidity (non-condensing) 5 to 95% RH
 Vibration, shock and freefall: IEC68-2-6, -27 and -32


MECHANICAL

DIN rail or direct panel mounting
 Packaging - Lexan with IP30 protection
 Weight (approximate): 0.17 Kg (0.25 lbs)
 Dimensions - 4 x 1 x 3.3" (10 x 2.5 x 8.3 cm)
 MTBF (estimated): >1,000,000 hours

DIMENSIONS

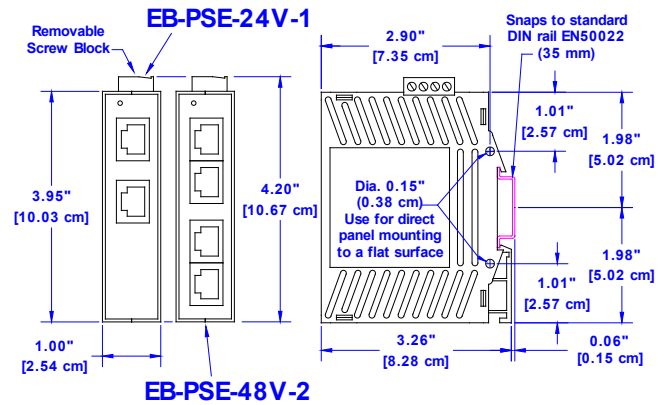

POWER WIRING

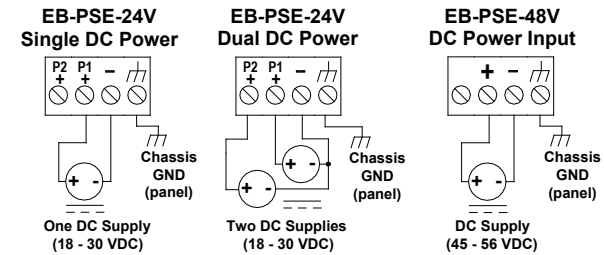

ORDERING GUIDE

PART NUMBER	DESCRIPTION
EB-PSE-24V-1A	PoE injector for 1 PoE port (uses unused pairs), 24V input
EB-PSE-48V-2A	PoE injector for 2 PoE port (uses unused pairs), 48V input
EB-PSE-24V-1B	Special order: uses signal pairs for PoE, ideal for 4 wire cables
EB-PSE-48V-2B	Special order: uses signal pairs for PoE, ideal for 4 wire cables

ACCESSORIES

PART NUMBER	DESCRIPTION
EB-PS-AC48-75	Industrial power supply, AC to 48 VDC, 75W, 1.5A
EB-PS-AC48-120	Industrial power supply, AC to 48 VDC, 120W, 2.5A
EB-PD-24V-1	PoE splitter for 24VDC devices, 13W

Other voltages available—special order.
 All specifications are subject to change. Consult factory for latest info.



По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72	Краснодар (861)203-40-90	Санкт-Петербург (812)309-46-40
Астана (7172)727-132	Красноярск (391)204-63-61	Саратов (845)249-38-78
Астрахань (8512)99-46-04	Курск (4712)77-13-04	Севастополь (8692)22-31-93
Барнаул (3852)73-04-60	Липецк (4742)52-20-81	Симферополь (3652)67-13-56
Белгород (4722)40-23-64	Магнитогорск (3519)55-03-13	Смоленск (4812)29-41-54
Брянск (4832)59-03-52	Москва (495)268-04-70	Сочи (862)225-72-31
Владивосток (423)249-28-31	Мурманск (8152)59-64-93	Ставрополь (8652)20-65-13
Волгоград (844)278-03-48	Набережные Челны (8552)20-53-41	Сургут (3462)77-98-35
Вологда (8172)26-41-59	Нижний Новгород (831)429-08-12	Тверь (4822)63-31-35
Воронеж (473)204-51-73	Новокузнецк (3843)20-46-81	Томск (3822)98-41-53
Екатеринбург (343)384-55-89	Новосибирск (383)227-86-73	Тула (4872)74-02-29
Иваново (4932)77-34-06	Омск (3812)21-46-40	Тюмень (3452)66-21-18
Ижевск (3412)26-03-58	Орел (4862)44-53-42	Ульяновск (8422)24-23-59
Казань (843)206-01-48	Оренбург (3532)37-68-04	Уфа (347)229-48-12
Калининград (4012)72-03-81	Пенза (8412)22-31-16	Хабаровск (4212)92-98-04
Калуга (4842)92-23-67	Пермь (342)205-81-47	Челябинск (351)202-03-61
Кемерово (3842)65-04-62	Ростов-на-Дону (863)308-18-15	Череповец (8202)49-02-64
Киров (8332)68-02-04	Рязань (4912)46-61-64	Ярославль (4852)69-52-93
	Самара (846)206-03-16	

Единый адрес: rno@nt-rt.ru **Веб-сайт:** www.redlion.nt-rt.ru